

Air Curtains



Range by Automatic Control Company Pty Ltd

Industrial Range




CON-TC 6



CON-TC 8



CON-MC 16

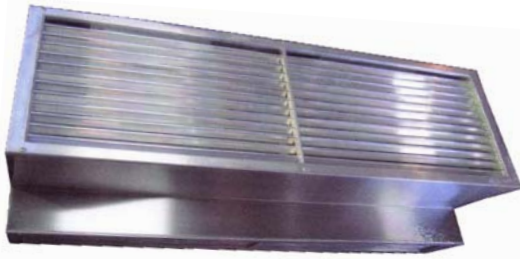

AUL-AC



ACS-CF

Quick Overview

Type	Lengths (mm)	Application		Casing	Motor	Options
		Temperature	Contamination			
CON-TC 6	900/1200/1500	✓	✓*	Stainless Steel	0.25kW / 240V	415V
CON-TC 8	900/1200/1500	✓	✓*		0.55-0.75kW / 240V	
CON-MC 16	900/1200	✓	✓*	Fibreglass	2.2kW / 415V	3kW / 415V
AUL-AC 900	900	✓	✓*	Powder Coated White	0.6kW / 240V	Stainless Steel & 415 V
AUL-AC 1200	1200	✓	✓*		0.6kW / 240V	
AUL-AC 1500	1500	✓	✓*		0.6 & 0.3kW / 240V	
ACS-CF-900	900	✓	✓*	Stainless Steel	1.1kW / 415V	
ACS-CF-1100	1100	✓	✓*		1.1kW / 415V	
ACS-CF-1300	1300	✓	✓*		1.5kW / 415V	
ACS-CF-1500	1500	✓	✓*		1.5kW / 415V	

* Contamination Rating to AQIS Standard Depending On Installation Heights.

Commercial Range



AG



GK-35



ACSO-ACA



GK-30

Quick Overview

Type	Lengths (mm)	Power Supply (V/Ph/Hz)	Outlet Velocity (Hi / Lo in m/s)	Noise Level (Hi in dB)	Weight (Kg)
AG-1.25-09	900	240/1/50	10.5 Hi	<47	16
AG-1.25-12	1200	240/1/50	10.5 Hi	<55	22.5
ACSO-ACA-038A	900	240/1/50	9.5 / 8.8	57	14
ACSO-ACA-048A	1200	240/1/50	8.2 / 6.5	55	17
ACSO-ACA-410A	1200	240/1/50	8.9 / 7.7	61	29
GK-3009AS	900	240/1/50	12.0 / 9.5	48	11
GK-3012AS	1200	240/1/50	12.0 / 9.5	49	14
GK-3509SA	900	240/1/50	17.5 / 12.0	68	20
GK3512SA	1200	240/1/50	17.5 / 12.0	70	25

Air curtains create an invisible barrier that helps save energy consumption while maintaining a clean, hygienic and comfortable environment.

- Keep conditioned air in
- Keep outside weather out
- Prevent refrigerated air escaping
- Eliminate discomfort near entrances
- Repel street dust & fumes
- Keep doors open
- Segregate areas in factories & warehouses
- Prevent the entry of flies & insects

Form 14.1_0712